



# ORDER FORM

FOR MORE DETAILED INFORMATION ON OUR WIRETRIM PRODUCTS, SEE OUR BROCHURE ONLINE AT [www.langeman.com](http://www.langeman.com)



**US & CANADIAN PRICE LIST  
SPRING 2010**

## PRICING INFORMATION

|           |         |
|-----------|---------|
| 1-9 ROLLS | \$29.90 |
| 10+ ROLLS | \$19.90 |

ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## SHIPPING & HANDLING

|            |          |
|------------|----------|
| 1-10 ROLLS | \$25.00  |
| 20 ROLLS   | \$30.00  |
| 40 ROLLS   | \$50.00  |
| 80 ROLLS   | \$70.00  |
| 200 ROLLS  | \$120.00 |


CONTINENTAL U.S. AND CANADA

### PATENTED TECHNOLOGY

WireTrim products are protected under one or more of the following patents.

Canada 2170573  
 United States 6025045, 6284319,  
 6875469, 7014900  
 Australia 712983  
 Japan 3818670  
 Europe 883445

WireTrim® is a registered trademark of LANGEMAN MANUFACTURING LTD

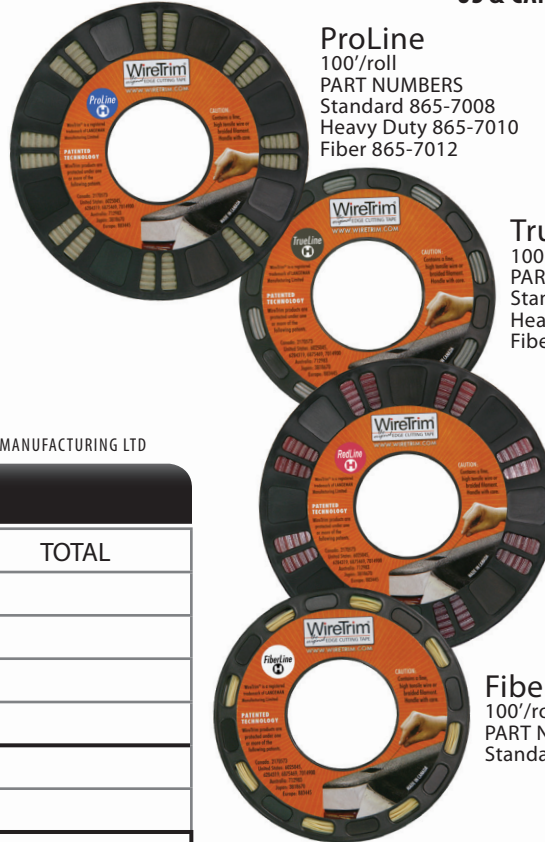

**ProLine**  
 100'/roll  
 PART NUMBERS  
 Standard 865-7008  
 Heavy Duty 865-7010  
 Fiber 865-7012

**TrueLine**  
 100'/roll  
 PART NUMBERS  
 Standard 865-9008  
 Heavy Duty 865-9010  
 Fiber 865-9012

**RedLine**  
 90'/roll  
 PART NUMBERS  
 Standard 865-8008  
 Heavy Duty 865-8010

**FiberLine**  
 100'/roll  
 PART NUMBER  
 Standard 865-4290

## ORDER INFORMATION

| PART NO.                            | QUANTITY | PRICE/ROLL          | TOTAL |
|-------------------------------------|----------|---------------------|-------|
|                                     |          |                     |       |
|                                     |          | SHIPPING & HANDLING |       |
|                                     |          | TOTAL USD or CAD    |       |
| TAXES THAT APPLY TO CANADIAN ORDERS |          | ONTARIO ONLY 8% PST |       |
|                                     |          | 5% GST              |       |
|                                     |          | <b>TOTAL</b>        |       |

## DELIVERY & PAYMENT INFORMATION

COMPANY \_\_\_\_\_  
 ADDRESS 1 \_\_\_\_\_  
 ADDRESS 2 \_\_\_\_\_  
 CITY \_\_\_\_\_  
 STATE/PROVINCE \_\_\_\_\_  
 ZIP/POSTAL CODE \_\_\_\_\_  
 P.O. NO. \_\_\_\_\_ FED TAX ID \_\_\_\_\_

CONTACT \_\_\_\_\_  
 TEL \_\_\_\_\_  
 FAX \_\_\_\_\_  
 EMAIL \_\_\_\_\_  
 CREDIT CARD # \_\_\_\_\_  
 CARDHOLDER NAME \_\_\_\_\_  
 EXPIRY DATE \_\_\_\_\_ CVV \_\_\_\_\_



CARDHOLDER SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_  
 If paying by check, make payable to Langeman Manufacturing Ltd and include with this form.  
 Please fax order to: 519.326.1027

LANGEMAN MANUFACTURING LTD

56 Oak Street East | Leamington ON | Canada | N8H 2C2 | Tel: 800.339.9701 | Fax: 519.326.1027 | [www.langeman.com](http://www.langeman.com)

## PRODUCT INFORMATION

### ProLine

ProLine is the original double-sided edge-cutting tape, known for its unique high-tack, copolymer adhesive that sticks instantly while allowing for unlimited repositioning. This is our most popular trimming tape and has become the industry standard, used to trim virtually every type of spray-on truck liner. ProLine can be used to trim everything from medium durometer polyurethane, applied with a low pressure spray system at room temperature, to high durometer polyureas, applied with high pressure at elevated temperatures. The fine crepe-paper body of ProLine tape allows the applicator to tear the tape manually and position it around curves and irregular surfaces with ease. The unique thickness and body of ProLine enables precise placement and conformity to nearly any shape or surface. The high-tack adhesive also serves to hold the tape in place while sanding or scuffing along the edge and importantly, keeps the filament edge tight to the surface, eliminating a spray-on coating from passing below and past the cutting edge. ProLine was developed to perform perfectly. The fine paper tape enables access to the filament by hand-tearing of the tape and also permits the filament to glide through the tape and coating without pulling the tape away from the surface prematurely.

**TRIMMING TIPS:** For best results, peel ProLine away from the surface slowly. With a little experience, the method required for clean removal is readily achieved.

**1/4 inch wide x 100 foot roll**, available in: **S H F**



### TrueLine

TrueLine is an excellent new product in our lineup of WireTrim® edge cutting tapes. Effectively replacing ThinLine while featuring many of the same preferred qualities, TrueLine incorporates a thin, transparent, double-sided tape with medium tack for simple, precise placement and re-application. The significant advantage of TrueLine is a multi-purpose adhesive that addresses the need for faster, residue-free removal. Taking into consideration all of the spray-on liner systems that exist today, TrueLine works well with high and low-pressure applications and will release cleanly over a broad variation of climatic conditions. The result of substantial research and development that goes into perfecting all of our WireTrim® products, TrueLine is a wire tape worth trying as your new tool and method for trimming spray-on truck liners.

**1/4 inch wide x 100 foot roll**, available in: **S H F**



### RedLine

RedLine incorporates a transparent, double-sided polyester tape with a unique high/low temperature, chemical-resistant adhesive. RedLine has a high-tack, full body adhesive, developed for difficult applications, particularly useful on most plastic surfaces, including vehicle trim components such as tailgate guards, fender skirts and rocker panel moldings. The signature red-tinted polyethylene release liner is easy to locate, flexible and tear-resistant, important elements for fast tear-off in a production environment. The liner being translucent, also allows for see-through inspection. RedLine is very flexible and conforms to curves and tight corners while maintaining excellent body and feel. RedLine is a premium product, well suited for application to die-cuts and other specialty masking systems. The special physical properties of RedLine allow for quick, residue-free removal.

**1/4 inch wide x 90 foot roll**, available in: **S H**



### FiberLine

FiberLine is a single-sided paper masking tape similar to the original FiberTrim with several technical advancements. A high-strength braided cutting filament is located securely along the outer edge of the adhesive surface and the all new FiberLine is traverse-wound on a plastic spool to prevent damage from rough handling and common workplace contaminants. FiberLine features a low-tack adhesive suitable for situations where the paint finish might be marginal.

**1/4 inch wide x 100 foot roll**, available in: **F**



**STANDARD DUTY** A .008 diameter, high-tensile metal wire filament that offers excellent cutting strength and works best in most applications. Conforms well to compound curves and tight corners.



**HEAVY DUTY** A .010 diameter, high-tensile metal wire filament that provides over 50% more cutting strength with somewhat less flexibility. Used for thicker, harder, and aggregate-filled coatings.



**HEAVY DUTY FIBER** A braided synthetic fiber filament that offers excellent cutting strength and cuts through thick non-abrasive coatings. Conforms easily to compound curves and tight corners.

**LANGEMAN MANUFACTURING LTD**

56 Oak Street East | Leamington ON | Canada | N8H 2C2 | Tel: 800.339.9701 | Fax: 519.326.1027 | [www.langeman.com](http://www.langeman.com)